



Ultra Rack Heavy Duty Boltless Racking

Safety Instructions

These units should be placed on a level surface. Failure to do so can result in poor performance or create a possible safety hazard. This unit should be securely anchored to a wall or floor with suitable fasteners, which are not included. Do not use this product for anything other than the manufacturers intended purpose. Do not stand on any part of the unit, or use it as a ladder. Do not overload. Evenly distribute the weight on each level and always keep the heavier loads near the bottom. Use care when working with metal parts.

General Instructions

Assembly is done with the rivets of the beams and braces fitting into the slots of the uprights. A rubber mallet may be used on the beams and braces to seat the rivets properly. A hammer can also be used, providing one uses a cloth or block of wood between the hammer head and the parts to prevent damage. Tap gently and be sure that the rivets are straight and fully engaged.

Assembly Instructions

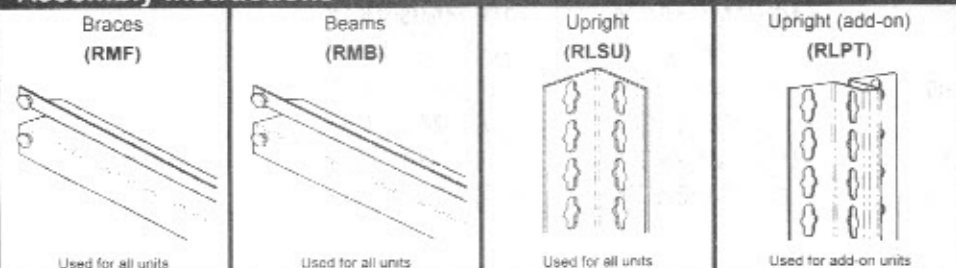


Figure A






Figure B



1. Start by assembling an end frame. Take two (2) uprights (RLSU), with one (1) brace (RMF). Skipping one (1) slot from the bottom of each upright (see figure A), place the rivets into the slots of the upright with the flat part facing up and tap lightly to properly seat rivets (See figure B). Continue by adding the remaining braces to complete the necessary levels for the end frame.


Figure C



2. Continue by constructing another end frame. Be sure to place the braces in the same upright slot locations as the first end unit so that both end units are identical.

3. To finish the unit (see figure C), install the beams (RMB). Skipping one slot from the bottom of each upright, place the beam rivets into the slots of the upright with the flat part facing up and tap down lightly to properly seat the rivets (see figure B). Start at the bottom of the end unit and work your way to the top. DOUBLE CHECK the completed unit and BE SURE that all rivets are properly seated, and that all beams and braces are level BEFORE applying any load to the unit.

Figure D

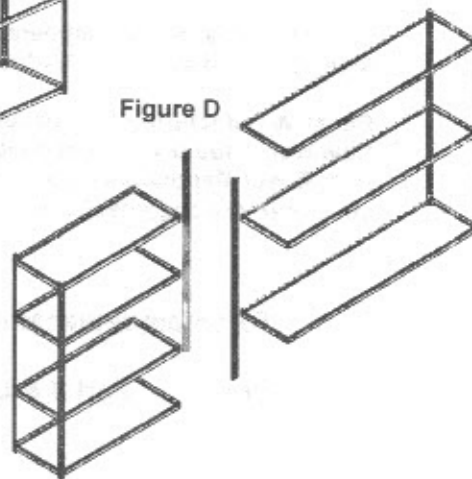

If you have purchased an add-on unit there are a few steps that will need to be followed. First make sure that the base unit is free of all items stored on it. Then start by removing two (2) uprights (RLSU) at one (1) end of the base unit, and the braces (RMF) that are connected to it (see figure D). Take two (2) of the add-on uprights (RLPT), and install them in place of where the other uprights (RLSU) were removed. Continue by adding the necessary braces (RMF) to both sides of the add-on uprights to complete the base unit and the add-on end frame (see figure E). Using the uprights removed from the base unit (RLSU), continue by following step one (1) and step three (3) as outlined above to complete construction of the unit (See figure F).









Figure F

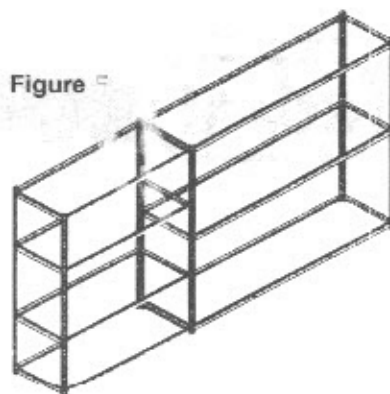

Part list and contact information on back side

Parts List

SKU#	Uprights (RLSU)	Braces (RMF)	Beams (RMB)	Woodboard (RPB)
				

UR1836	(8) RLSU36	(10) RMF18GY	(10) RMB36GY	18 X 36
UR2436	(8) RLSU36	(10) RMF24GY	(10) RMB36GY	24 X 36
UR1848	(8) RLSU36	(10) RMF18GY	(10) RMB48GY	18 X 48
UR2448	(8) RLSU36	(10) RMF24GY	(10) RMB48GY	24 X 48
UR1860 - SK	(8) RLSU36	(10) RMF18GY	(10) RMB60GY	----
UR2460 - SK	(8) RLSU36	(10) RMF24GY	(10) RMB60GY	----
UR3660 - SK	(8) RLSU36	(10) RMF36GY	(10) RMB60GY	----
UR1872 - SK	(8) RLSU36	(10) RMF18GY	(10) RMB72GY	----
UR2472 - SK	(8) RLSU36	(10) RMF24GY	(10) RMB72GY	----
UR3672 - SK	(8) RLSU36	(10) RMF36GY	(10) RMB72GY	----

Contact Information

Should you have any comments or problems with the assembly of this unit please contact Edsal Manufacturing at (773) 475-3000 and request Customer Service or customerservice@edsal.com.

Edsal Manufacturing has made every effort to assure that all units are complete and undamaged. However, should your unit have damaged or missing parts, replacements can be obtained directly from Edsal Manufacturing at (773) 475-3000 and asking for Customer Service or customerservice@edsal.com.

To obtain replacement parts, please provide the following information:

- Model # - Part # & Description - Location Purchased - Date Purchased

www.edsal.com



The Innovative Source For Storage Systems & Workplace Furniture

Edsal Manufacturing Company 4400 South Packers Avenue Chicago, IL 60609 (773) 475 - 3000